


SCHALTEN / OPERATE QUICKLY

EFEN 

EFEN SILAS

EFEN SILAS NH Fuse-Switches-horizontal design

SILAS系列 低压方形熔断器式负荷隔离开关

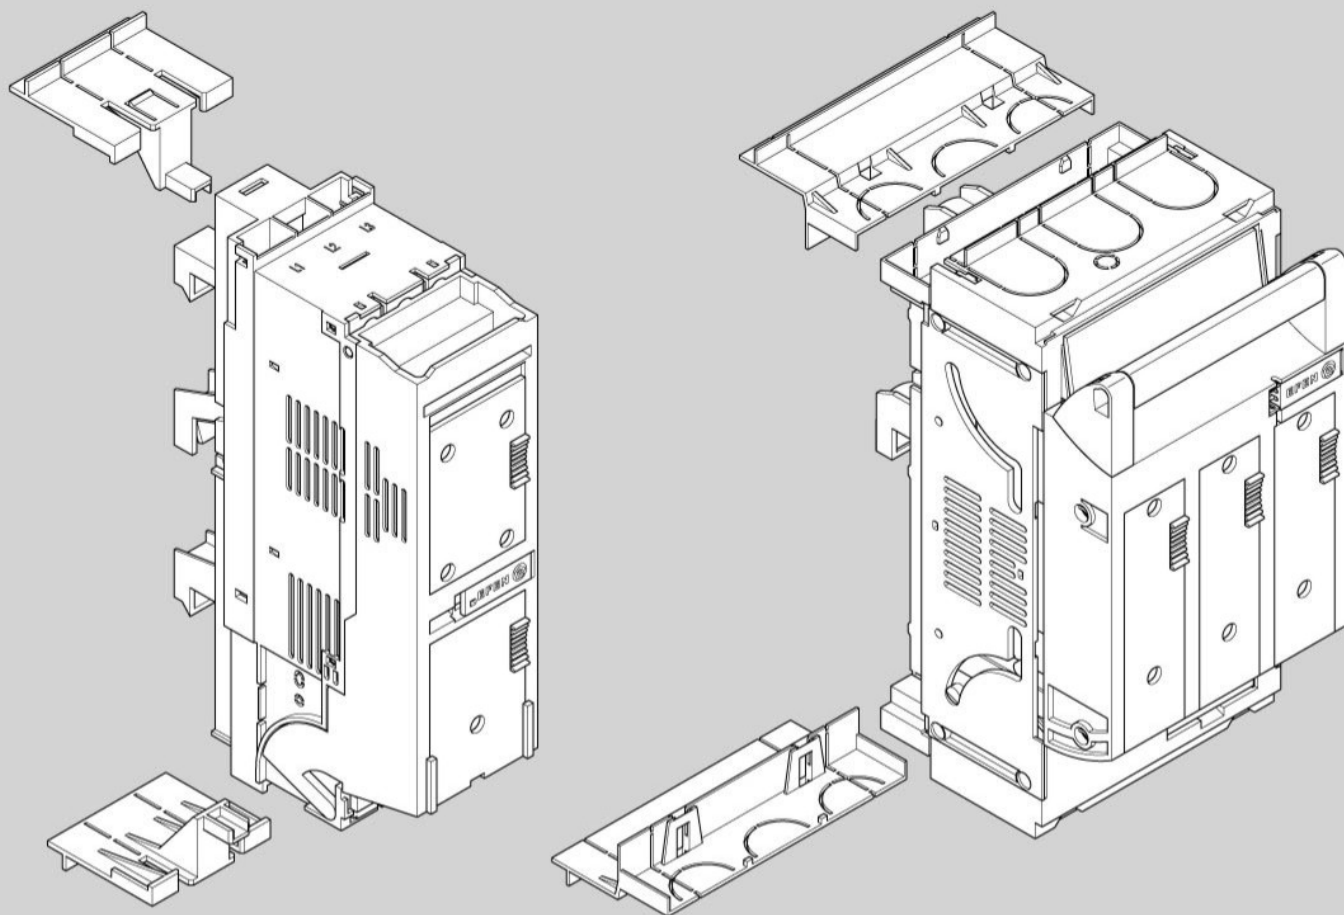

完美系列 The Complete Range

便于导轨安装
Easy mounting
onto supporting rails




完善的防意外触碰
Protection against accidental
contact in the standard version



连接端子穿孔设计
Perforated versions
for connections



三极共分断，
方形设计，
安装于60mm母线系统的示意图
Drawing of the NH Fuse-Switch,
3-pole switching, horizontal
design for busbar supply
on a 60 mm busbar systems

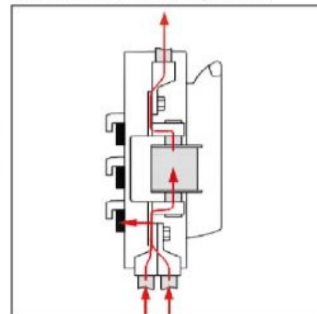


系统


能够提供全球市场从最紧凑的尺寸000型到尺寸3型的方形熔断器开关，全系列产品具有同样的安装深度，并具有完善的防意外触碰的保护装置。多种附件能够灵活满足不同客户的需求。

System

All switches from size 000, the smallest NH Fuse-Switch, horizontal design, currently available on the market, to size 3. All devices have the same installation depth and a perfect protection against accidental contact. The wide range of accessories offers all users a high level of possibilities for modification. The ideally harmonized sizes and matching accessories as well as a consistent design make the NT-SILAS series one of the most cutting-edge products on the market.

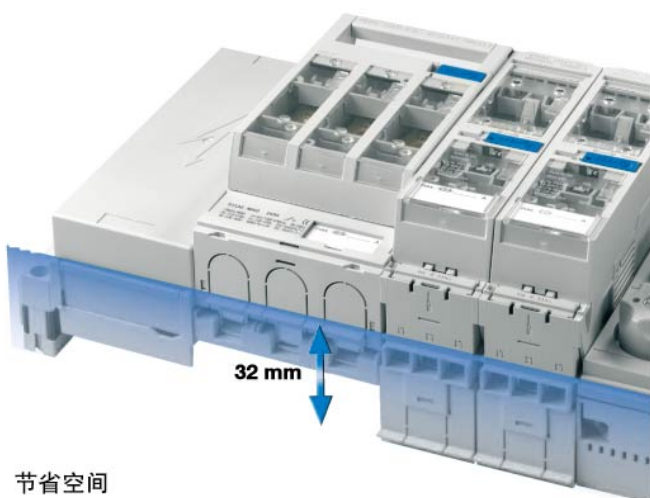

节省空间
Saves space

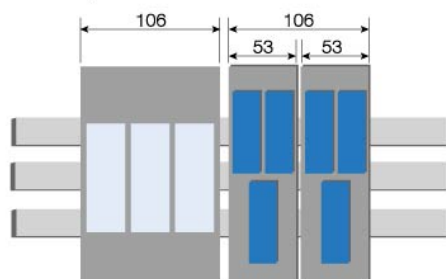

特点

NT-SILAS产品能够给配电箱里面的方形熔断器开关提供新的解决方案，目的是为了提供高安全性能和便于母线安装的模块化系统。

Features

The product-line NT-SILAS offers new solutions for the application of NH Fuse-Switches, horizontal design, in power distribution cabinets. The intention was to develop a modular system with high safety standards and easy-to-install busbar mounting.


可旋转的挂钩
(接线端可选择顶部或底部)
rotatable hooks
(Variable selection of cable
terminal on either top or bottom)



熔断器监控
电子监控或机械监控
Fuse monitoring
(electronical or mechanical)



多种接线方式
A large range of
connection possibilities

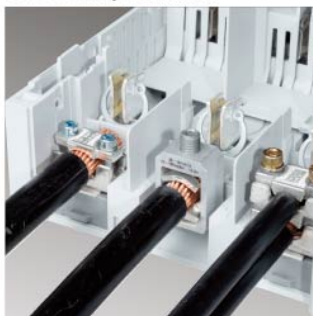

完美的保护装置
Perfect protection



目录 Content

	尺码 Size	页码 Page
技术参数-产品范围概述 Technical data-Product range overview	000-3	5
技术参数-符合VDE0660 T107/EN/IEC 60947-3 GB14048.3标准 Technical data acc. To VDE0660 T107/EN/IEC 60947-3 GB14048.3	000-3	6
技术参数-电缆及力矩介绍 Technical data-Conductor and Tightening torques	000-3	7
平面安装的开关 NH Fuse-Switches SILAS for baseplate mounting	000-3	8-9
40/12mm母线安装的开关 NH Fuse-Switches SILAS for busbar mounting 40/12mm	000-2	10-11
60mm母线安装的开关 NH Fuse-Switches SILAS for busbar mounting 60mm	000-3	12-14
60mm母线安装挂钩连接的开关 NH Fuse-Switches SILAS for busbar supply 60mm	1-2	15
技术参数-电子式熔断器监控 Technical data-Electronic Fuse-Monitoring		16
技术参数-带有断路器的机械式熔断器监控 Technical data-Mechanical fuse monitoring with circuit breaker		17
附件 Accessories		18-23
尺寸图-平面安装 Dimensions drawings for baseplate mounting	000-3	24
尺寸图-40/12mm母线安装 Dimensions drawings for busbar mounting 40/12mm	000-3	25
尺寸图-60mm母线安装 Dimensions drawings for busbar mounting 60mm	000-3	26

EFEN SILAS 熔断器开关结合了尖端技术和现代时尚的造型。

尺码000型到3型全系列产品符合人体工程学的设计，具有显著的优势。所有开关手柄的特殊外形，确保了理想的用户使用方便性及安全性。

EFEN SILAS 熔断器开关及其配件为所有应用方案提供了成熟的元器件。多种连接可能性是一个特殊的优势。例如，所有尺码的开关具有用于直接接线的线夹。

多种监控系统，例如电子式熔断器监控、机械式熔断器监控或用于位置指示的微动开关，确保了和整个系统完美的匹配。

EFEN SILAS NH Fuse-Switches combine sophisticated technology with modern styling.

The ergonomic design of the complete range of products in the sizes 000 to 3 offers convincing advantages. The special shape of the switch handles for all versions ensures optimal user-friendliness and safe operation.

EFEN SILAS Fuse-Switches and the accessories provide proven components for all applications. The various connection possibilities are a special benefit. For example, a box clamp for direct connections is available for all sizes.

The various monitoring systems such as the electronic or mechanical fuse monitoring or the switch-position indication ensure perfect compatibility.

技术参数 Technical data

产品范围概述 Product range overview

	尺码000 Size 000	尺码00 Size 00	尺码1 Size 1	尺码2 Size 2	尺码3 Size 3
平面安装 Base plate mounting	•	•	•	•	•
40/12mm母线安装 Busbar system 40/12 mm	•	•	•	•	
60mm母线安装 Busbar system 60 mm	•	•	•	•	•
100mm母线安装 Busbar system 100 mm			•	•	•
导轨安装 Supporting rail mounting	•	•	•		
侧面防护条 Bracing profile, lateral	•	•	•	•	•
连接室盖板 Terminal housing cover	•	•	•	•	•
线夹连接 用于铜电缆 Clamp connector for Cu conductors		•	•	•	•
棱形接线端 用于铜/铝电缆 Prism terminal for Cu/Al conductors		•	•	•	•
棱形接线端 用于双铜/铝电缆 Prism terminal for 2 conductors CU/AL			•	•	•
平头螺栓连接 Box terminal	•	•	•	•	•
位置指示 Position indicating	•	•	•	•	•
电子式熔断器监控 Electronic fuse monitoring	•	•	•	•	•
机械式熔断器监控 Mechanical fuse monitoring		•	•	•	•
锁定窗 Locking window	•	•	•	•	•
横向安装 Horizontal installation	•	•	•	•	•

技术参数 符合VDE0660 T107/EN/IEC 60947-3 GB14048.3标准
Technical Data acc. to VDE 0660 T107/EN/IEC 60947-3 GB14048.3

符合VDE0636 T2标准的低压熔断器 For NH Fuse-Links acc. to VDE 0636 T2	尺码 Size	000	00	1	2	3
额定工作电流 I_e Rated operational current I_e	A	100	160	250	400	630
常规的温升电流 I_{th} Conventional free air thermic current I_{th}	A	100	160	250	400	630
额定工作电压 U_e Rated operational voltage U_e	V	690				
额定绝缘电压 U_i Rated insulation voltage U_i	V	1000				
额定冲击耐受电压 U_{imp} Rated impuls withstand voltage U_{imp}	kV	6	8	12	12	12
额定条件下的短路电流(采用熔断器保护时) Rated conditional short circuit current (when protected by NH Fuse-Links)	kA	80	80	80	50	80
使用类别VDE0660 T107/EN/IEC 60947-3 Utilization category VDE 0660 T107/EN/IEC 60947-3	$U_e = 400 \text{ V AC}$ $U_e = 690 \text{ V AC}$ $U_e = 220 \text{ V DC}$ $U_e = 440 \text{ V DC}$	AC-23B AC-21B on demand ¹⁾ DC-22B ²⁾	AC-23B AC-21B DC-22B on demand ¹⁾	AC-23B AC-22B DC-21B DC-21B	AC-23B AC-22B DC-21B DC-21B	AC-23B AC-21B DC-21B DC-21B
机械使用寿命 Mechanical durability	次数 Cycles	2000	1600	1600	1000	1000
环境温度 Permissible ambient temperature	-25°C 至 +55°C / -25°C up to +55°C					
防护等级 Degree of protection DIN/EN 60529/VDE 0470 T1	IP 3X					
熔断器的最大功率损耗 Maximum power dissipation of the NH Fuse-Links	W	7,5	12	23	34	48
未装熔断器的重量 Weight without NH Fuse-Links	kg	0,54	0,84	2,2	3,6	4,1

备注:1)根据具体要求

2)如有特殊需求, 请索取进一步说明

Notice: 1) On demand

2) For special request, please ask for more informations

电缆型号和尺寸
Conductor types and sizes

接线方式 Type of Terminal	电缆类型 Conductor	Type	NH 000	NH 00	NH 1	NH 2	NH 3	尺码 Size
通用连接(螺母连接) Multiple use terminal (screw terminal)			-	M8	M10	M10	M10	
带螺栓线夹 Pressure plate with screws	铜 CU	re/rm/sm	-	6-50	70-150	-	-	mm ²
			-	6-25	6- 50	6-70	6-70	
带螺栓和棱形接线压块的线夹 Pressure plate with screws and contact prism	铜 CU 铝 AL	re/rm/ se/sm	-	6-70	70-150	120-240	150-300	mm ²
带螺栓和棱形接线压块的线夹 用于双电缆连接 Pressure plate with screws and contact prism for two conductors	铜 CU 铝 AL	rm/se/sm	-	-	2x35-70	2x70-120	2x150	mm ²
平头螺栓连接 Box terminal	铜 CU	rm/re	2,5-50	2,5-95	35-150	95-300	95-300	mm ²
		se/sm	-	-	50-150	120-300	120-300	
	铝 AL	rm/re	-	-	35-150	95-300	95-300	
		se/sm	-	-	50-150	120-300	120-300	
扁平导体 Flat conductor					1 x20	8 x32	8 x32	
					15x20	20x32	20x32	

紧固接线端扭矩和母线安装力矩
Tightening torques for terminal and busbar mounting

尺码 Size	NH 000	NH 00	NH 1	NH 2	NH 3
接线方式 Type of Terminal	紧固扭矩Nm Tightening torques Nm				
通用连接(螺母连接) Multiple use terminal (screw terminal)	-	12	20	20	20
带螺栓的压块 Pressure plate with screws	-	3	6	8	8
带螺栓和棱形接线压块的线夹 Pressure plate with screws and contact prism	-	3	6	8	8
母线连接 Busbar contacting	4,5	6	6	8	8
平头螺栓连接 Box terminal	4,5	4,5	12	20	20

双线缆连接
Connection of two cable lugs

尺码 Size	16 mm ²	25 mm ²	35 mm ²	50 mm ²	70 mm ²	95 mm ²	120 mm ²	150 mm ²	185 mm ²	240 mm ²	300 mm ²
00	2 x	2 x	2 x	2 x							
1	2 x	2 x	2 x	2 x	2 x	2 x	2 x	2 x	2 x		
2								2 x	2 x	2 x	2 x
3								2 x	2 x	2 x	2 x

此表中电缆所使用的线缆接头需符合DIN46235。其他线缆接头会有不同差异，但是大部分可连接

For verification of this table, cable lugs according to DIN 46235 were used. Other common cable lugs may have different dimensions, but are most likely connectable.

方形熔断器开关

SILAS系列提供了连续性的设计和多种范围的附件,为各种应用提供解决方案。

NH Fuse-Switches, horizontal design, series SILAS offer with her continuous designing and the great range of accessories a solution for all applications.

尺寸图请见24页

For dimensions drawings see page 24



34076-0000

方形熔断器开关, 690V AC, 三极共分断, 平面安装

NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for baseplate mounting

特性

- 最佳的标签位置
- 完善的手部保护装置
- 便捷的导轨安装方式

Properties:

- Optimum labeling
- Integrated hand protection
- Easy and fast mounting on supporting rails possible

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
平头螺栓连接 rm/re 50 mm ² With Box terminal rm/re 50 mm ²	000	100 A	34040-0007	SILAS NH000 R4R4	1	0,4
通用连接 (螺母 M8) Multiple use terminal (screw M8)	00	160 A	34077-0000	SILAS NH00 U5U5	1	0,6
平头螺栓连接 rm/re 50 mm ² With Box terminal rm/re 95 mm ²	00	160 A	34076-0000	SILAS NH00 R5R5	1	0,6
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	34170-0000	SILAS NH1 U2U2	1	2,0
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	34175-0000	SILAS NH1 RR	1	2,2
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	34270-0000	SILAS NH2 U2U2	1	3,0
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	2	400 A	34275-0000	SILAS NH2 RR	1	3,6
通用连接 (螺母 M10) Multiple use terminal (screw M10)	3	630 A	34370-0000	SILAS NH3 U2U2	1	3,5
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	3	630 A	34375-0000	SILAS NH3 RR	1	4,0



34170-0130

方形熔断器开关, 690V AC, 三极共分断, 平面安装

NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for baseplate mounting

特性

- 带电子监控单元
- 无需附加额外电源
- 独立的信号输出端

Properties:

- With electronical fuse monitoring
- No auxiliary power supply required
- Independent of supply side

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
平头螺栓连接 rm/re 50 mm ² With Box terminal rm/re 50 mm ²	000	100 A	34040-0137	SILAS NH000 ESF MA R4R4	1	0,5
通用连接 (螺母 M10) Multiple use terminal (screw M8)	00	160 A	34077-0130	SILAS NH00 ESF MA U5U5	1	0,7
平头螺栓连接 rm/re 95 mm ² With Box terminal rm/re 95 mm ²	00	160 A	34076-0130	SILAS NH00 ESF MA R5R5	1	0,7
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	34170-0130	SILAS NH1 ESF MA U2U2	1	2,1
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	34175-0130	SILAS NH1 ESF MA RR	1	2,2
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	34270-0130	SILAS NH2 ESF MA U2U2	1	3,1
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	2	400 A	34275-0130	SILAS NH2 ESF MA RR	1	3,7
通用连接 (螺母 M10) Multiple use terminal (screw M10)	3	630 A	34370-0130	SILAS NH3 ESF MA U2U2	1	3,6
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	3	630 A	34375-0130	SILAS NH3 ESF MA RR	1	4,1

方形熔断器开关

SILAS系列提供了连续性的设计和多种范围的附件，为各种应用提供解决方案。

NH Fuse-Switches, horizontal design,

series SILAS offer with her continuous design and the great range of accessories a solution for all applications.

尺寸图请见24页

For dimensions drawings see page 24



34170-0030

方形熔断器开关，690V AC，三极共分断，平面安装

NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for baseplate mounting

特性

- 带机械监控单元
- 监测所有熔断器状态
- 独立的信号输出端

Properties:

- With mechanical fuse monitoring
- Monitoring of status of all fuses
- Independent of supply side

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
通用连接 (螺母 M8) Multiple use terminal (screw M8)	00	160 A	34077-0030	SILAS NH00 SN U5U5	1	1,0
平头螺栓连接 rm/re 95 mm ² With Box terminal rm/re 95 mm ²	00	160 A	34076-0030	SILAS NH00 SN R5R5	1	1,0
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	34170-0030	SILAS NH1 SN U2U2	1	2,4
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	34175-0030	SILAS NH1 SN RR	1	2,6
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	34270-0030	SILAS NH2 SN U2U2	1	3,4
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 300 mm ²	2	400 A	34275-0030	SILAS NH2 SN RR	1	4,0
通用连接 (螺母 M10) Multiple use terminal (screw M10)	3	630 A	34370-0030	SILAS NH3 SN U5U5	1	3,9
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 300 mm ²	3	630 A	34375-0030	SILAS NH3 SN RR	1	4,4

母线安装的熔断器开关提供了大量的详细解决方案，例如相同的安装深度和简单的端子侧变换。

The NH Fuse-Switches for busbar mounting offers a lot of detailed solutions, for example the equal installation depth and the easy changing of the terminal side.

尺寸图请见25页

For dimensions drawings see page 25



39000-0007

方形熔断器开关，690V AC，三极共分断，40mm母线安装，安装深度70mm 符合DIN43870
NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for busbar systems 40 mm, installation depth 70 mm acc.to DIN43870

特性

- 最佳的标签位置
- 完善的手部保护装置
- 便捷的导轨安装方式

Properties:

- Optimum labeling
- Integrated hand protection
- Easy and fast mounting on supporting rails possible

描述 Description	尺码 Size	电流 Amps I_n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
平头螺栓连接 rm/re 50 mm ² 底部接线 With Box terminal rm/re 50 mm ² Branch bottom	000	100 A	39000-0007	SILAS SB NH000 40 AU R4	1	0,5
通用连接 (螺母 M8) Multiple use terminal (screw M8)	00	160 A	39021-0000	SILAS SB NH00 40 EB70 U5	1	0,7
平头螺栓连接 rm/re 95 mm ² With Box terminal rm/re 95 mm ²	00	160 A	39020-0000	SILAS SB NH00 40 EB70 R5	1	0,7
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	39060-0000	SILAS SB NH1 40 EB70 U2	1	2,1
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	39061-0000	SILAS SB NH1 40 EB70 R	1	2,3
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	39078-0000	SILAS SB NH2 40 EB70 AO U2	1	3,3
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	2	400 A	39079-0000	SILAS SB NH2 40 EB70 AO R	1	3,6



39000-0137 + 39020-0130

方形熔断器开关，690V AC，三极共分断，40mm母线安装，安装深度70mm 符合DIN43870
NH Fuse-Switches 690 V AC, 3-pole switching for busbar systems 40 mm, installation depth 70 mm acc.to DIN43870

特性

- 带电子监控单元
- 无需附加额外电源
- 独立的信号输出端

Properties:

- With electronical fuse monitoring
- No auxiliary power supply required
- Independent of supply side

描述 Description	尺码 Size	电流 Amps I_n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
平头螺栓连接 rm/re 50 mm ² 底部接线 With Box terminal rm/re 50 mm ² Branch bottom	000	100 A	39000-0137	SILAS SB NH000 40 ESF MA AU R4	1	0,6
通用连接 (螺母 M8) Multiple use terminal (screw M8)	00	160 A	39021-0130	SILAS SB NH00 40 EB70 ESF MA U5	1	0,9
平头螺栓连接 rm/re 95 mm ² With Box terminal rm/re 95 mm ²	00	160 A	39020-0130	SILAS SB NH00 40 EB70 ESF MA R5	1	0,9
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	39060-0130	SILAS SB NH1 40 EB70 ESF MA U2	1	2,3
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	39061-0130	SILAS SB NH1 40 EB70 ESF MA R	1	2,3
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	39078-0130	SILAS SB NH2 40 EB70 ESF MA AO U2	1	3,3
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	2	400 A	39079-0130	SILAS SB NH2 40 EB70 ESF MA AO R	1	3,6

母线安装的熔断器开关
提供了大量的详细解决方案，
例如相同的安装深度
和简单的端子侧变换。

The NH Fuse-Switches for busbar mounting
offers a lot of detailed solutions, for example the
equal installation depth and the easy changing of
the terminal side.

尺寸图请见25页

For dimensions drawings see page 25



39079-0030

方形熔断器开关，690V AC，三极共分断，40mm母线安装，安装深度70mm 符合DIN43870
NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for busbar systems 40 mm,
installation depth 70 mm acc.to DIN43870

特性

- 带机械监控单元
- 监测所有熔断器状态
- 独立的信号输出端

Properties:

- With mechanical fuse monitoring
- Monitoring of status of all fuses
- Independent of supply side

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
通用连接 (螺母 M8) Multiple use terminal (screw M8)	00	160 A	39021-0030	SILAS SB NH00 40 EB70 SN U5	1	1,2
平头螺栓连接 rm/re 95 mm ² With Box terminal rm/re 95 mm ²	00	160 A	39020-0030	SILAS SB NH00 40 EB70 SN R5	1	1,2
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	39060-0030	SILAS SB NH1 40 EB70 SN U2	1	2,6
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	39061-0030	SILAS SB NH1 40 EB70 SN R	1	2,6
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	39078-0030	SILAS SB NH2 40 EB70 SN AO U2	1	3,6
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	2	400 A	39079-0030	SILAS SB NH2 40 EB70 SN AO R	1	3,9

方形熔断器开关，SILAS系列
为母线安装方式提供了许多优点

- 旋转挂钩设计，底部或顶部接线变换
- 尺寸000型是全球最紧凑设计
- 所有尺寸高度统一

The NH Fuse-Switches, horizontal design, series SILAS offers a lot of advantage by mounting onto busbar systems.

- Rotating hook contacting for terminal top or bottom
- Smallest device worldwide by size 000
- Standard high for the field cover by all sizes

尺寸图请见26页

For dimensions drawings see page 26



39040-0000

方形熔断器开关，690V AC，三极共分断，60mm母线安装，安装深度32mm

NH-Fuse-Switches horizontal design, 690 V AC, 3-pole switching for busbar systems 60 mm, installation depth 32 mm

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
平头螺栓连接 rm/re 50 mm ² 底部接线 With Box terminal rm/re 50 mm ² Branch bottom	000	100 A	39010-0007	SILAS SB NH000 60 AU R4	1	0,5
平头螺栓连接 rm/re 50 mm ² 顶部接线 With Box terminal rm/re 50 mm ² Branch top	000	100 A	39011-0007	SILAS SB NH000 60 AO R4	1	0,5
平头螺栓连接 rm/re 95 mm ² 安装深度 32 mm With Box terminal rm/re 95 mm ² install. depth 32 mm	00	160 A	39040-0000	SILAS SB NH00 60 EB32 R5	1	0,8



39050-0000

方形熔断器开关，690V AC，三极共分断，60mm母线安装，安装深度70mm，挂钩连接

NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for busbar systems 60 mm, installation depth 70 mm, hook contacting

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
平头螺栓连接 rm/re 50 mm ² 底部接线 With Box terminal rm/re 50 mm ² Branch bottom	000	100 A	39010-0007	SILAS SB NH000 60 AU R4	1	0,5
平头螺栓连接 rm/re 50 mm ² 顶部接线 With Box terminal rm/re 50 mm ² Branch top	000	100 A	39011-0007	SILAS SB NH000 60 AO R4	1	0,5
通用连接 (螺母 M8) Multiple use terminal (screw M8)	00	160 A	39052-0000	SILAS SB NH00 60 EB70 U5	1	0,8
平头螺栓连接 rm/re 95 mm ² 安装深度 70 mm With Box terminal rm/re 95 mm ² install. depth 70 mm	00	160 A	39050-0000	SILAS SB NH00 60 EB70 R5	1	0,8
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	39064-0000	SILAS SB NH1 60 EB70 U2	1	2,2
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	39068-0000	SILAS SB NH1 60 EB70 R	1	2,2
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	39070-0000	SILAS SB NH2 60 EB70 U2	1	3,2
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	2	400 A	39074-0000	SILAS SB NH2 60 EB70 R	1	3,5
通用连接 (螺母 M10) Multiple use terminal (screw M10)	3	630 A	39080-0000	SILAS SB NH3 60 EB70 U2	1	3,9
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	3	630 A	39084-0000	SILAS SB NH3 60 EB70 R	1	4,1

方形熔断器开关，SILAS系列为母线安装方式提供了许多优点

- 旋转挂钩设计，底部或顶部接线变换
- 尺寸000型是全球最紧凑设计
- 所有尺寸高度统一

The NH Fuse-Switches, horizontal design, series SILAS offers a lot of advantage by mounting onto busbar systems.

- Rotating hook contacting for terminal top or bottom
- Smallest device worldwide by size 000
- Standard high for the field cover by all sizes

尺寸图请见26页

For dimensions drawings see page 26



39040-0130

方形熔断器开关，690V AC，三极共分断，60mm母线安装，安装深度32mm

NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for busbar systems 60 mm, installation depth 32 mm

特性

- 带电子监控单元
- 无需附加额外电源
- 独立的信号输出端

Properties:

- With electronical fuse monitoring
- No auxiliary power supply required
- Independent of supply side

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
平头螺栓连接 rm/re 50 mm ² 底部接线 With Box terminal rm/re 50 mm ² Branch bottom	000	100 A	39010-0137	SILAS SB NH000 60 MA AU R4	1	0,6
平头螺栓连接 rm/re 50 mm ² 顶部接线 With Box terminal rm/re 50 mm ² Branch top	000	100 A	39011-0137	SILAS SB NH000 60 MA AO R4	1	0,6
平头螺栓连接 rm/re 95 mm ² 安装深度 70 mm With Box terminal rm/re 95 mm ² install. depth 70 mm	00	160 A	39040-0130	SILAS SB NH00 60 EB32 ESF MA R5	1	0,9



39080-0130

方形熔断器开关，690V AC，三极共分断，60mm母线安装，安装深度70mm

NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for busbar systems 60 mm, installation depth 70 mm

特性

- 带电子监控单元

Properties:

- With electronical fuse monitoring

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
平头螺栓连接 rm/re 50 mm ² 底部接线 With Box terminal rm/re 50 mm ² Branch bottom	000	100 A	39010-0137	SILAS SB NH000 60 MA AU R4	1	0,6
平头螺栓连接 rm/re 50 mm ² 顶部接线 With Box terminal rm/re 50 mm ² Branch top	000	100 A	39011-0137	SILAS SB NH000 60 MA AO R4	1	0,6
通用连接 (螺母 M8) Multiple use terminal (screw M8)	00	160 A	39052-0130	SILAS SB NH00 60 EB70 ESF MA U5	1	0,9
平头螺栓连接 rm/re 95 mm ² 安装深度 70 mm With Box terminal rm/re 95 mm ² install. depth 70 mm	00	160 A	39050-0130	SILAS SB NH00 60 EB70 ESF MA R5	1	0,9
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	39064-0130	SILAS SB NH1 EB70 ESF70 MA U2	1	2,3
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	39068-0130	SILAS SB NH1 60 EB70 ESF MA R	1	2,3
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	39070-0130	SILAS SB NH2 60 EB70 ESF MA U2	1	3,3
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	2	400 A	39074-0130	SILAS SB NH2 60 EB70 ESF MA R	1	3,6
通用连接 (螺母 M10) Multiple use terminal (screw M10)	3	630 A	39080-0130	SILAS SB NH3 60 EB70 ESF MA U2	1	4,0
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	3	630 A	39084-0130	SILAS SB NH3 60 EB70 ESF MA R	1	4,1

尺寸图请见26页

For dimensions drawings see page 26



39068-0030

方形熔断器开关, 690V AC, 三极共分断, 60mm母线安装, 安装深度70mm

NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for busbar systems 60 mm, installation depth 70 mm

特性

- 带机械监控单元
- 监测所有熔断器状态
- 独立的信号输出端

Properties:

- With mechanical fuse monitoring
- Monitoring of status of all fuses
- Independent of supply side

描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
通用连接 (螺母 M8) Multiple use terminal (screw M8)	00	160 A	39052-0030	SILAS SB NH00 60 EB70 SN U5	1	1,2
平头螺栓连接 rm/re 95 mm ² 安装深度 70 mm With Box terminal rm/re 95 mm ² install. depth 70 mm	00	160 A	39050-0030	SILAS SB NH00 60 EB70 SN R5	1	1,2
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	39064-0030	SILAS SB NH1 60 EB70 SN U2	1	2,6
平头螺栓连接 rm/re 150 mm ² With Box terminal rm/re 150 mm ²	1	250 A	39068-0030	SILAS SB NH1 60 EB70 SN R	1	2,6
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	39070-0030	SILAS SB NH2 60 EB70 SN U2	1	3,6
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	2	400 A	39074-0030	SILAS SB NH2 60 EB70 SN R	1	3,9
通用连接 (螺母 M10) Multiple use terminal (screw M10)	3	630 A	39080-0030	SILAS SB NH3 60 EB70 SN U2	1	4,3
平头螺栓连接 rm/re 300 mm ² With Box terminal rm/re 300 mm ²	3	630 A	39084-0030	SILAS SB NH3 60 EB70 SN R	1	4,5

方形熔断器开关应用于60mm母线

SILAS系列熔断器开关用于进线时可具有附加的接线端，可以同时做60mm母线系统的进线和附加出线

- 节约成本
- 节省空间
- 无需打孔直接安装在母排上
- 尺码1和2也可用于60mm母线系统

NH Fuse-Switches SILAS for busbar supply

60mm The feeder fuse switch SILAS has additional terminals. Therefore you can feeder a busbar system 60mm and additional fuse outlets.

- Cost-efficient
- Space-saving
- Direct assembly on busbars without drilling
- Size 1 and 2 for 60 mm busbar-systems



39086-0000

方形熔断器开关，690V AC，三极共分断，60mm母线安装，使用挂钩连接母线

NH Fuse-Switches horizontal design, 690 V AC, 3-pole switching for busbar system 60 mm with hook contacting for busbar supply


描述 Description	尺码 Size	电流 Amps I _n	订货号 Order no.	型号 Description	包装 Pack	重量 Weight in kg
通用连接 (螺母 M10) Multiple use terminal (screw M10)	1	250 A	39086-0000	SILAS SE NH1 60 EB70 U2U2	1	2,3
通用连接 (螺母 M10) Multiple use terminal (screw M10)	2	400 A	39087-0000	SILAS SE NH2 60 EB70 U2U2	1	3,6

示意图

Dimensions drawings



母线进线 busbar feeder

具有附加进线 Additional fuse outlets




没有熔断器保护的进线/ Feeder without NH Fuse-Links

250 A SILAS 1
400 A SILAS 2
进线/ Feeder
最大500A SILAS 1/ max. 500 A SILAS 1
最大800A SILAS 2/ max. 800 A SILAS 2



有熔断器保护的进线/ Feeder with NH Fuse-Links

125 A SILAS 1
200 A SILAS 2
进线/ Feeder
最大250A SILAS 1/ max. 250 A SILAS 1
最大400A SILAS 2/ max. 400 A SILAS 2



电子式熔断器监控

- 无故障指示-绿色
- 故障指示-红色
- 无需附加额外电源
- 远程信号指示 通过4位插孔 1组常开和1组常闭
- 监测所有熔断器，一旦故障红灯闪烁
- 在更换熔断器后自动重新设置
- 独立的信号输出端

Electronic Fuse-Monitoring

- Indication of fault-free operation by green LED
- Fault-indication by red LED
- No auxiliary power supply required
- Remote indication via 4-pole plug by 1 n/o and 1 n/c switch
- Monitoring of all fuses; red LED flashes in case of failure
- Automatic reset after replacement of defective fuse(s)
- Independent of supply side

技术参数

Technical details

额定工作电压U _e Rated operational voltage U _e	AC 400 V – AC 690 V DC 220 V
额定绝缘电压U _i Rated insulation voltage U _i	1000 V
额定冲击耐受电压U _{imp} Rated impuls withstand voltage U _{imp}	8 kV
额定条件下的短路电流(使用熔断器保护时) Rated conditional short circuit current (With protection by NH-fuses)	50 kA
允许环境温度 Permissible ambient temperatur	-20至+55 °C -20 up to +55 °C
额定频率 Rated frequency	50/60Hz
延迟时间 Delay time	1 - 1,5 s
功能 Function	电压降 voltage drop
显示部件 Display elements	正常工作:绿灯闪烁 熔断器熔断:红灯闪烁 Operation voltage indication: green LED flashing Fuse-Link released: red LED flashing
报警输出 Alarm output	AC 250V/DC 30V 最大至5A AC 250 V/DC 30 V max. 5 A

带有断路器的机械式熔断器监控

- 指示: I-工作 O-故障
- 远程信号指示 通过4位插孔 1组常开和1组常闭
- 无需附加额外电源
- 监视所有熔断器状态

Mechanical fuse monitoring with circuit breaker

- Indication: "I" position – ready for operation "O" position – fault-function
- Remote indication via 4-pole connector by 1 n/o and 1 n/c switch
- No auxiliary power supply required
- Monitoring of status of all fuses

技术参数

Technical details

额定工作电压 U_e Rated operational voltage U_e	AC 24 V-AC 690 V / 50/60 Hz / DC 24 V – DC 250 V			
额定绝缘电压 U_i Rated insulation voltage U_i	690 V			
额定冲击耐受电压 U_{imp} Rated impuls withstand voltage U_{imp}	6 kV			
额定限制短路电流(使用熔断器保护时) Rated conditional short circuit current (With protection by NH-fuses)	50 kA			
允许环境温度 Permissible ambient temperatur	-20至+55 °C -20 up to +55 °C			
延迟时间 Delay time	< 0,5 s			
功能 Function	电压降为25V up 25 V voltage drop			
显示部件 Display elements	指示: I-工作 O-故障 Ready for operation: handle display "I", Fault message: handle display "O"			
报警输出 Alarm output	辅助触点-1组常开和1组常闭 Auxiliary switch 1 opening + 1 making contact			
额定电压 Rated voltage	AC 24 V	AC 230 V	DC 24 V	DC 60 V
额定电流 Rated current	2A	0,5A	1A	0,15A

选择不同功能的附件
能让产品适用于不同
的应用方案

With these multifunctional accessories
you have the possibility to modify
the device to all applications.



36934-0010

带螺栓线夹 用于铜电缆和多层软铜排

Pressure plates for Cu conductors, se, sm and laminated copper

特性

- 便于连接铜电缆和多层软铜排
- 1套=3个

Properties:

- Easy supplementation for the connection of Cu conductors, se, sm and laminated copper
- 1 Set = 3 pcs.

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
6 - 50 mm ²	00	36934-0010	1SATZ (3STÜCK) DRUCKSTÜCKE GR.00 SILAS	1
70 - 150 mm ²	1	36936-0010	1SATZ (3STÜCK) DRUCKSTÜCKE GR.1 SILAS	1
120 - 240 mm ²	2	36997-0010	1SATZ (3STÜCK) DRUCKSTÜCKE GR.2 SILAS	1
150 - 300 mm ²	3	36981-0010	1SATZ (3STÜCK) KONTAKTPRISMEN GR.3 SILAS	1



36975-0010

棱形接线压块 多种接线方式

Contact prism for multiple use terminal

特性

- 便于连接铜铝电缆
- 1套=3个

Properties:

- Easy supplementation for the connection of Cu- and Al conductors
- 1 Set = 3 pcs.

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
6 - 70 mm ²	00	36975-0010	1SATZ (3STÜCK) KONTAKTPRISMA GR.00 SILAS	1
70 - 150 mm ²	1	36942-0010	1SATZ (3STÜCK) KONTAKTPRISMEN GR.1 SILAS	1
120 - 240 mm ²	2	36943-0010	1SATZ (3STÜCK) KONTAKTPRISMEN GR.2 SILAS	1
150 - 300 mm ²	3	36981-0010	1SATZ (3STÜCK) KONTAKTPRISMEN GR.3 SILAS	1



36982-0010

棱形接线压块 用于双铜铝电缆

Contact prism for two copper and aluminium conductors

特性

- 便于连接双铜铝电缆
- 1套=3个

Properties:

- Easy supplementation for the connection of 2 Cu- and Al conductors
- 1 Set = 3 pcs.

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
2 x 35 - 70 mm ²	1	36982-0010	1SATZ (3ST) KONTAKTPR.2LEITER GR.1 SILAS	1
2 x 70 - 120 mm ²	2	36983-0010	1SATZ (3ST) KONTAKTPR.2LEITER GR.2 SILAS	1
2 x 150 - 185 mm ²	3	36984-0010	1SATZ (3ST) KONTAKTPR.2LEITER GR.3 SILAS	1



36994-0010

平头螺栓连接

Box terminal

特性

- 1套=3个

Properties:

- 1 Set = 3 pcs.

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
35 - 150 mm ²	1	36992-0010	1SATZ (3STÜCK) RAHMENKLEMME GR.1 SILAS	1
95 - 300 mm ²	2 - 3	36994-0010	1SATZ (3STÜCK) RAHMENKLEMME GR.2+3 SILAS	1

选择不同功能的附件
能让产品适用于不同
的应用方案

With these multifunctional accessories
you have the possibility to modify
the device to all applications.



36953-0010

SILAS尺码1-3 AC-23 使用范围附加装置

Add-on-kit AC 23, size 1-3 SILAS

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
SILAS尺码1-3 AC-23 使用范围附加装置 Add-on kit AC23 for size 1-3 SILAS (1 Set = 3 pcs.)	1-3	36953-0010	NACHRÜSTS. AC23 GR.1-3 SILAS (1SATZ=3ST)	1



36954-0010

连接端罩盖

Terminal cover

特性

- 可以多个连接 防止对带电部分的触碰

Properties:

- To add for more protection against touching
of live parts

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
连接端罩盖 (用于母线安装) Terminal cover, small version for busbar devices	000	36954-0010	BERÜHRUNGSSCHUTZ GR.000 SILAS/000IN	1
连接端罩盖 Terminal cover	00	36935-0010	BERÜHRUNGSSCHUTZ GR.00 SILAS	1
连接端罩盖 Terminal cover	1	36960-0010	BERÜHRUNGSSCHUTZ GR.1 SILAS	1
连接端罩盖 Terminal cover	2	36950-0010	BERÜHRUNGSSCHUTZ GR.2 SILAS	1
连接端罩盖 Terminal cover	3	36952-0010	BERÜHRUNGSSCHUTZ GR.3 SILAS	1



36962-0010

防护条

Support profile

特性

- 侧面安装

Properties:

- laterally attachable

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
防护条 Support profile	000	36962-0010	BLENDSTREIFEN GR.000 SILAS /000IN	1
防护条 Support profile	00	36941-0010	1SATZ (2STÜCK) BLENDSTREIFEN GR.00 SILAS	1
防护条 Support profile	1-3	36940-0010	1SATZ (2ST) BLENDSTREIFEN GR.1-3 SILAS	1



36937-0010

快速安装件

Quick fixing set

特性

- 用于尺码1型开关 导轨安装 间距为125mm或150mm


Properties:

- For use on 2 supporting rails for spacing 125 or
150 mm by size 1

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
快速安装件 Quick fixing set for size 000, small version	000	36949-0010	SCHNELLEBESFESTIGUNG 125/150 GR.000 SILAS	1
导轨快速安装件间距125或150mm Quick fixing set for supporting rails, distance 125 or 150 mm	00-1	36937-0010	SCHNELLEBESFESTIGUNG 125/150 GR.00/1 SILAS	1

选择不同功能的附件
能让产品适用于不同
的应用方案

With these multifunctional accessories
you have the possibility to modify the
device to all applications.



36959-0060

用于位置指示的微动开关
Micro switch for position indicating

特性

- 用于位置指示

Properties:

- For position indicating

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
微动开关 Micro switch, small version	000-00	36959-0010	MIKROSCHALTER GR.000-00 SILAS	1
微动开关 Micro switch	1-3	36959-0060	MIKROSCHALTER GR.1-3 SILAS	1



36969-0010

锁定视窗
Locking window

特性

- 防护和防窃电

Properties:

- Protection vs. power theft

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
防护和防窃电000-3型 protection vs. power theft, Size 000-3 SILAS	000-3	36969-0010	STROMDIEBSTAHSICHERUNG GR.000-3 SILAS	1



36988-0010

接线端扩展件
Terminal extension

特性

- 用于安装深度32mm
- 1套=3件

Properties:

- For installation depth of 32 mm
- 1 Set = 3 pcs.

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
接线端扩展件 Terminal extension	1	36988-0010	1SATZ ANSCHLUSSVERLÄNGERUNG SILAS GR.1	1
接线端扩展件 Terminal extension	2	36989-0010	1SATZ (3STÜCK) ANSCHLUSSVERL.GR.2 SILAS	1
接线端扩展件 Terminal extension	3	36990-0010	1SATZ (3STÜCK) ANSCHLUSSVERL.GR.3 SILAS	1



36985-0010

母线转接板
Busbar adapter

特性

- 用于100mm母线

Properties:

- For busbar systems 100 mm


描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
母线转接板 Busbar adapter	1	36985-0010	SAMMELSCHIENENADAPTER GR.1 SUKAS 100MM	1
母线转接板 Busbar adapter	2	36986-0010	SAMMELSCHIENENADAPTER GR.2 SUKAS 100MM	1
母线转接板 Busbar adapter	3	36987-0010	SAMMELSCHIENENADAPTER GR.3 SUKAS 100MM	1

高品质的埃芬馈电条用于方形熔断器式开关，提供了：

- 简单安全的接线方式
- 快速安装
- 减少配线

The feeding devices from EFEN are an high quality supplementary for the NH Fuse-Switches, horizontal design and offers

- Easy and safety connection method
- Fast mounting
- Reduce wiring



方形熔断器式开关的馈电条 SILAS系列

Feeding devices for NH Fuse-switches, horizontal design, series SILAS

特性

- 简单安全的接线方式
- 可快速安装
- 减少配线
- 00型的开关只适用于通用连接


Properties:

- Easy and safety connection method
- Fast mounting
- Reduce wiring
- By size 00 only for the switches with multiple use terminal

90280-0100

描述 Description	尺码 Size	订货号 Order-No.	型号 Description	包装 Pack
馈电条 Feeding device 2 X SILAS NH000	000	90276-0100	EINSPEISEKAMM 2X SILAS NH000	4
馈电条 Feeding device 3 X SILAS NH000	000	90276-0200	EINSPEISEKAMM 3X SILAS NH000	4
馈电条 Feeding device 4 X SILAS NH000	000	90276-0300	EINSPEISEKAMM 4X SILAS NH000	4
馈电条 Feeding device 5 X SILAS NH000	000	90276-0400	EINSPEISEKAMM 5X SILAS NH000	4
馈电条线夹25-95mm ² RM/SM Feeding clamp 25 - 95 mm ² RM/SM SILAS NH000	000	90277-0100	EINSPEISEKLEMM 95MM2SILAS NH000	3
馈电条 Feeding device for 2 switches	00	90280-0100	EINSPEISEKAMM 2X SILAS/IN NH00	4
馈电条 Feeding device for 3 switches	00	90280-0200	EINSPEISEKAMM 3X SILAS/IN NH00	4
馈电条 Feeding device for 4 switches	00	90280-0300	EINSPEISEKAMM 4X SILAS/IN NH00	4
馈电条 Feeding device for 5 switches	00	90280-0400	EINSPEISEKAMM 5X SILAS/IN NH00	4


附件 用于000型和00型开关
Accessories for the size 000 and 00

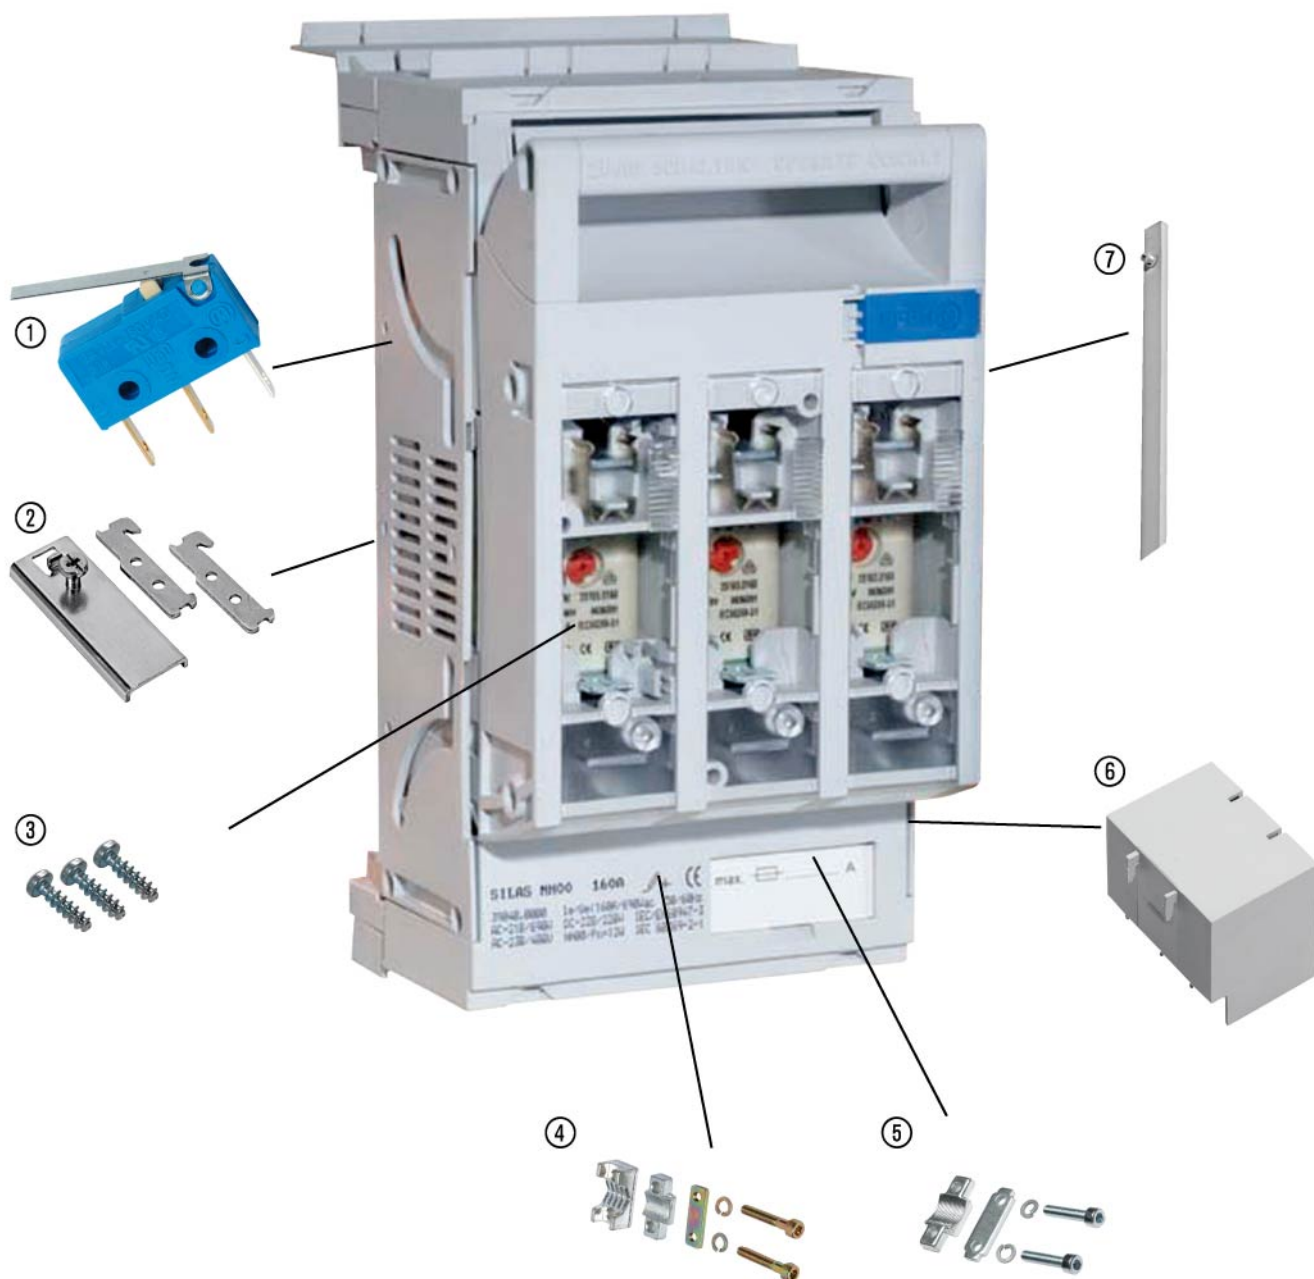

- ① 36959-0060 微动开关
- ② 36937-0010 快速安装件
- ③ 36969-0010 防护和防窃电
- ④ 36975-0010 棱形接线压块 用于通用连接6-70mm²
- ⑤ 36934-0010 带螺栓线夹 用于电缆和多层软铜排6-70mm²
- ⑥ 36954-0010 连接端罩盖
- ⑦ 36962-0010 防护条


- micro switch
- quick fixing set
- protection vs. power theft
- contact prism for multiple use terminal 6-70 mm²
- pressure plates for Cu conductors, se, sm and laminated cooper 6-70 mm²
- terminal cover
- support profile

附件 用于1-3型开关 Accessories for size 1 - 3

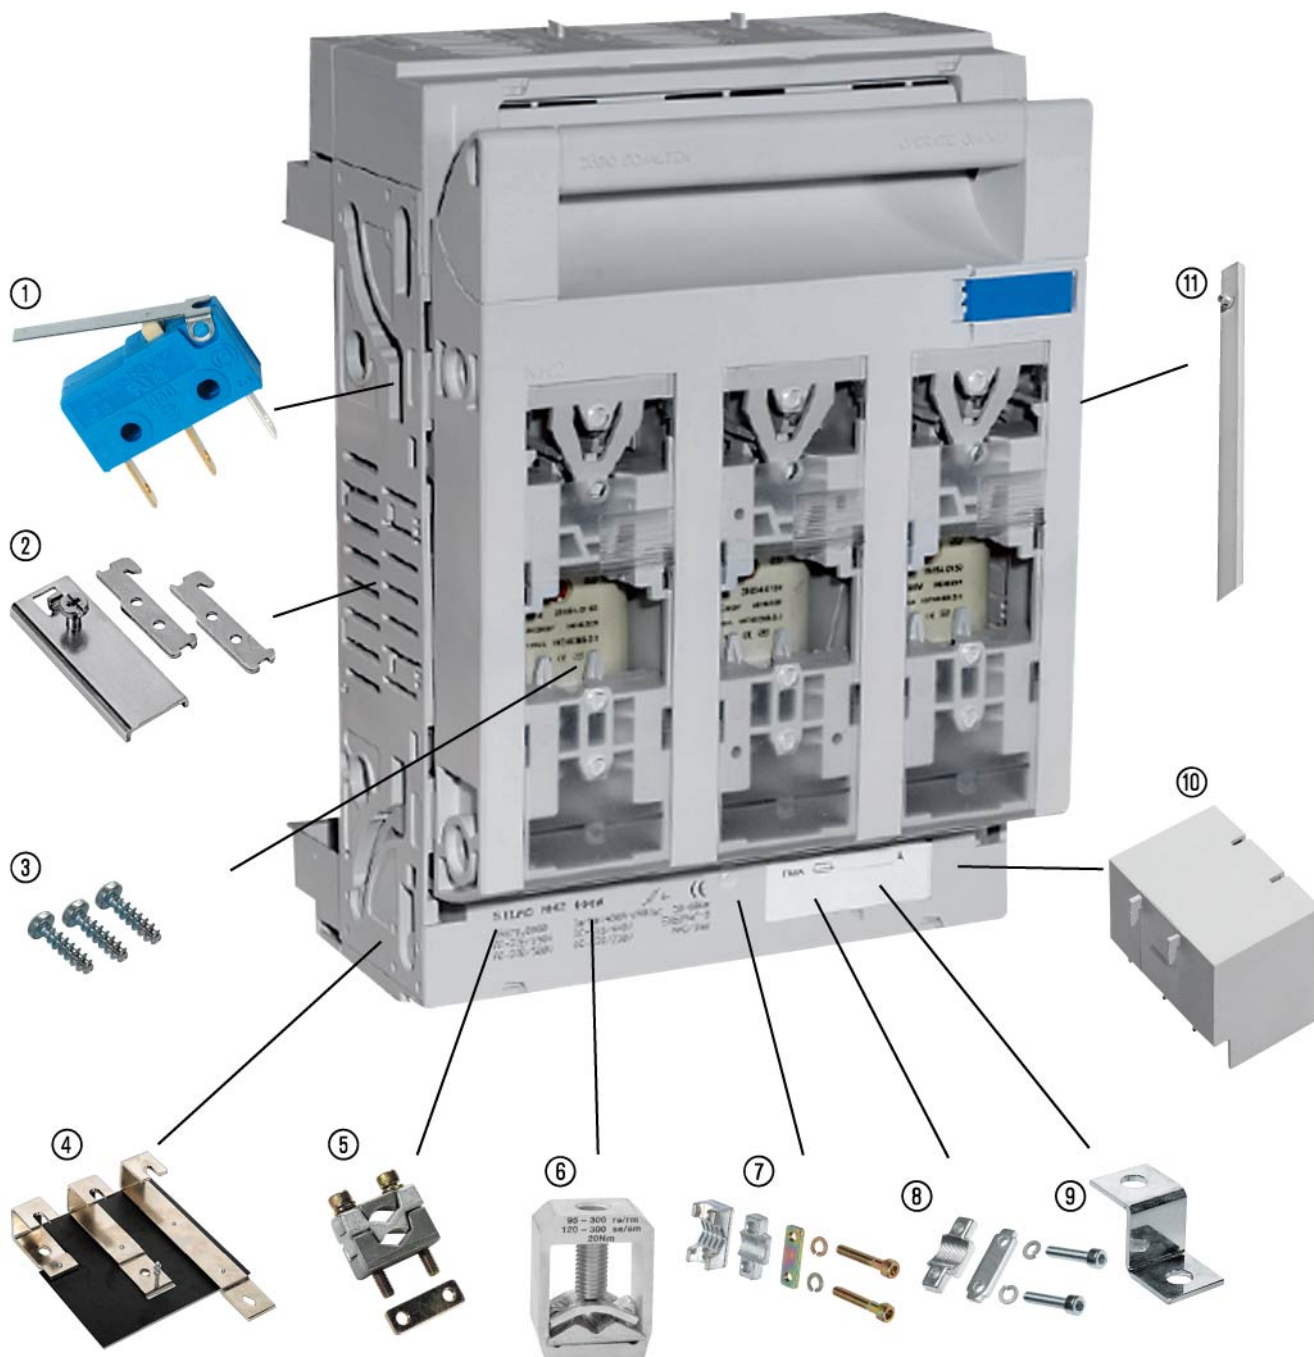


- | | | |
|--------------|---|---|
| ① 36959-0060 | 微动开关 | micro switch |
| ② 36937-0010 | 快速安装件 | quick fixing set |
| ③ 36969-0010 | 防护和防窃电 | protection vs. power theft |
| ④ 36985-0010 | 母线转接板 | busbar adapter |
| ⑤ 36982-0010 | 棱形接线压块 用于双铜铝电缆 2 x 35-70mm ² | contact prism for two copper and aluminium conductors 2 x 35-70 mm ² |
| ⑥ 36992-0010 | 平头螺栓连接35-150mm ² | box terminal 35-150 mm ² |
| ⑦ 36942-0010 | 棱形接线压块 用于通用连接70-150mm ² | contact prism for multiple use terminal 70-150 mm ² |
| ⑧ 36936-0010 | 带螺栓线夹 用于电缆和多层软铜排 70-150mm ² | pressure plates for Cu conductors, se, sm and laminated cooper 70-150 mm ² |
| ⑨ 36988-0010 | 接线端扩展件 | terminal extension |
| ⑩ 36954-0010 | 连接端罩盖 | terminal cover |
| ⑪ 36962-0010 | 防护条 | support profile |


尺寸图/ Dimensions drawings
000型/ Size 000

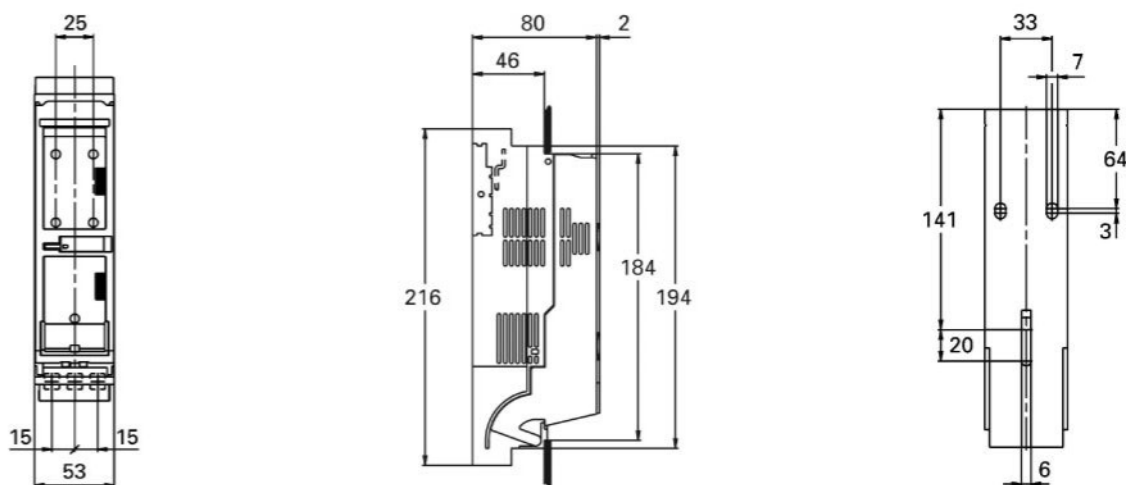

尺寸图/ Dimensions drawings
00型/ Size 00

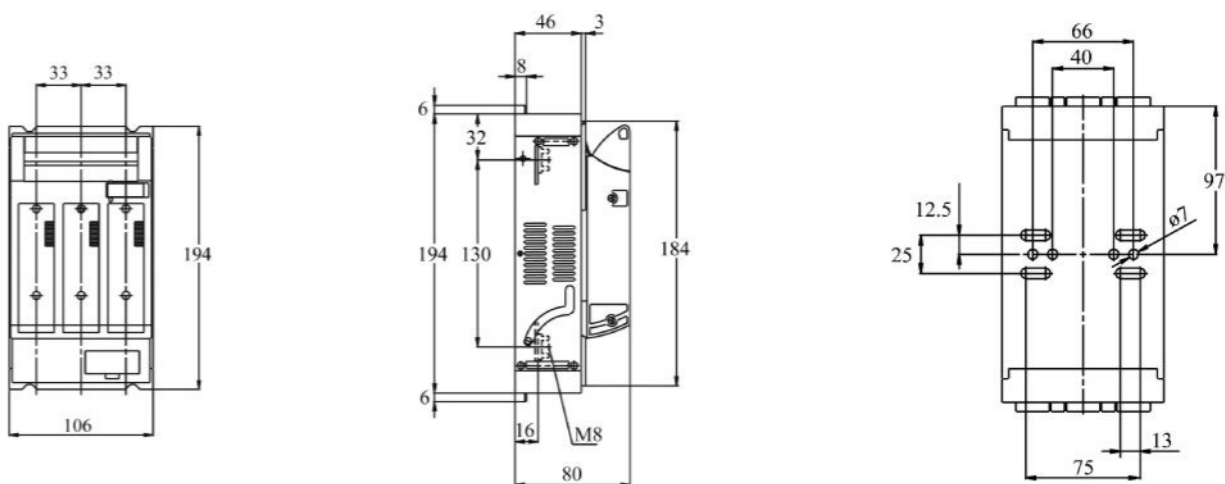

尺寸图/ Dimensions drawings
1-3型/ Size 1-3

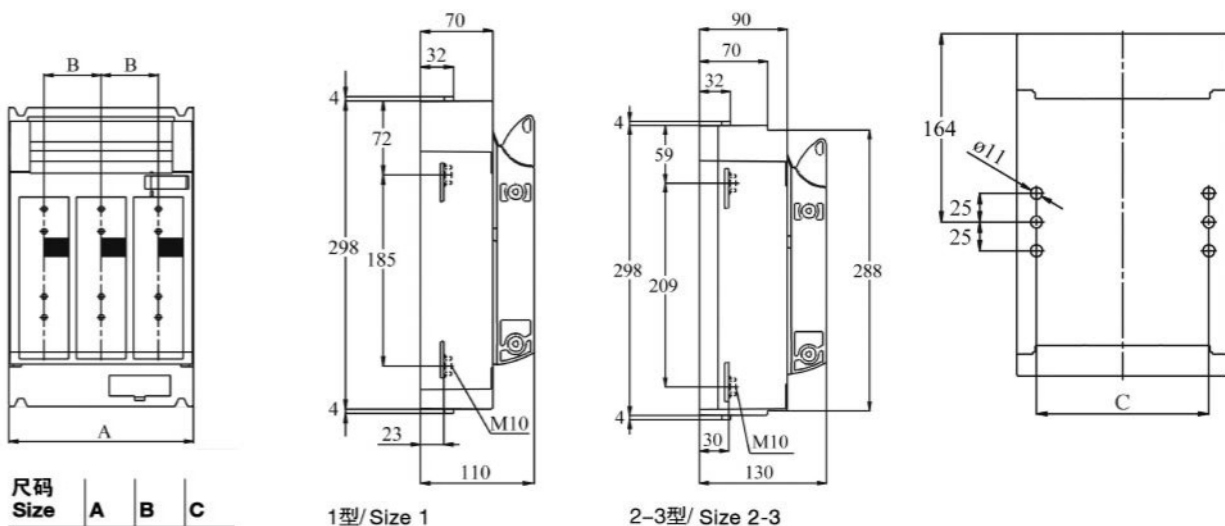


尺码 Size	A	B	C
1	184	57	150
2	210	65	166
3	250	80	195

1型/ Size 1



2-3型/ Size 2-3

尺寸图
Dimensions drawings

尺寸图/ Dimensions drawings
000型/ Size 000


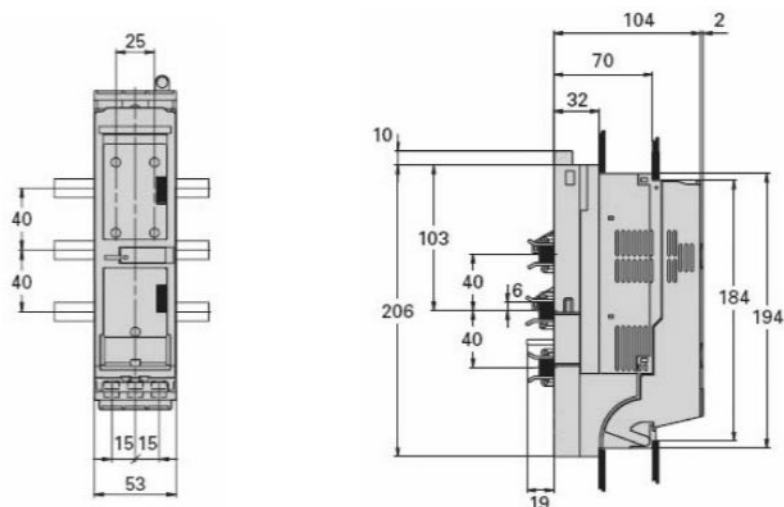


尺寸图/ Dimensions drawings
00型/ Size 00

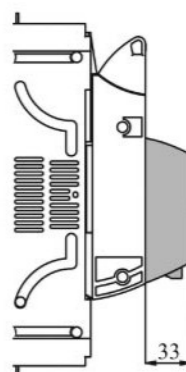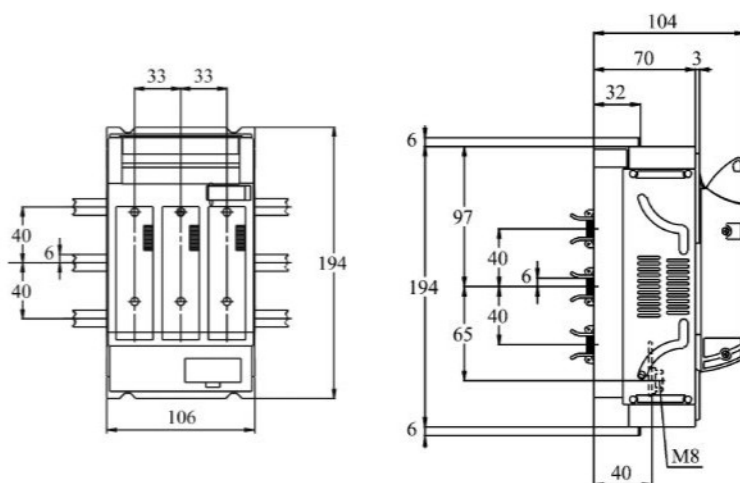

电子式熔断器监控
Electronic fuse monitoring

尺寸图/ Dimensions drawings
1-3型/ Size 1-3

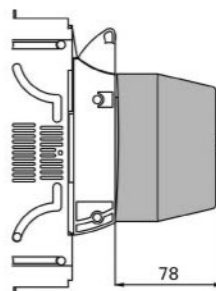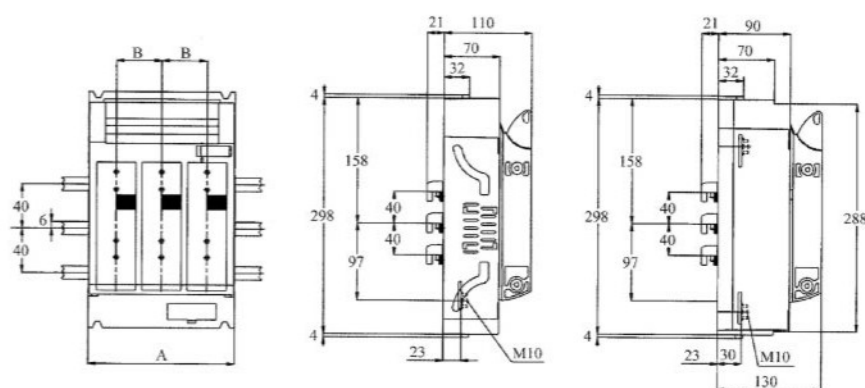


机械式熔断器监控 Mechanical fuse monitoring

尺码 Size	A	B
1	184	57
2	210	65
3	250	80



1型/ Size 1

2-3型/ Size 2-3

尺寸图/ Dimensions drawings
000型/ Size 000


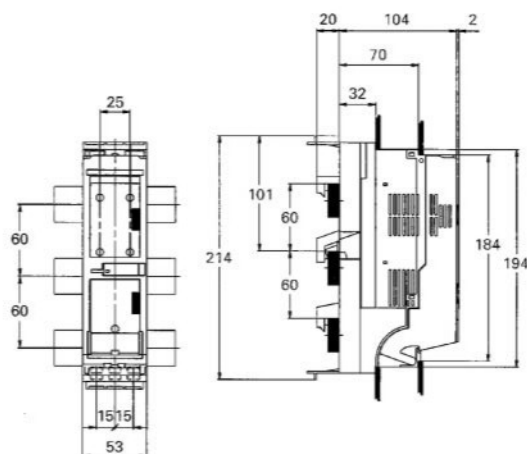


尺寸图/ Dimensions drawings
00型/ Size 00

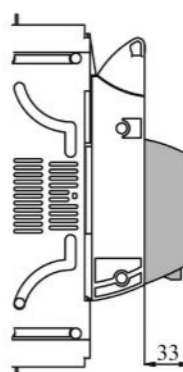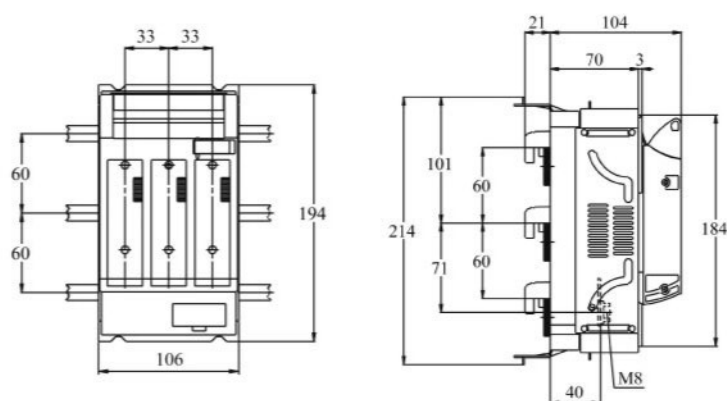

电子式熔断器监控
Electronic fuse monitoring

尺寸图/ Dimensions drawings
1-3型/ Size 1-3

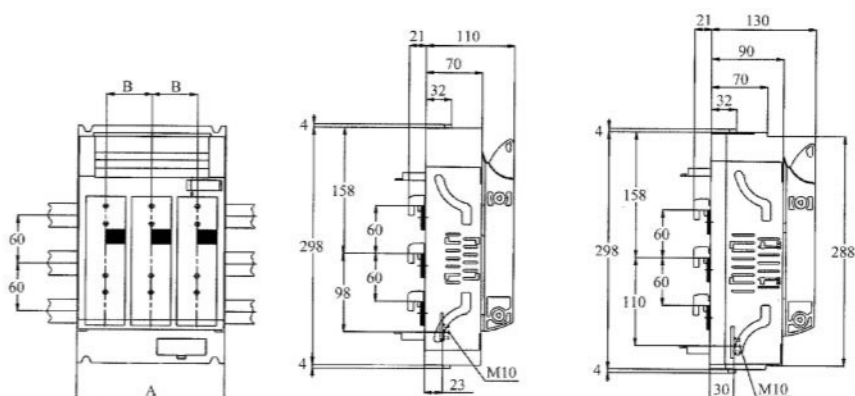

机械式熔断器监控
Mechanical fuse monitoring

尺码 Size	A	B
1	184	57
2	210	65
3	250	80

1型/ Size 1


2-3型/ Size 2-3

备忘录:

Notes :

[illegible]

- N** 低压熔断器
NH Fuse-Links
- NU** 低压熔断器底座
NH Fuse-Bases
- LT** 负荷熔断器开关
Load Break Switches/Switch-Fuses
- LU** 转换开关
Changeover Switches
- NT-SILAS** 低压方形熔断器开关
NH Fuse-Switches-horizontal design
- E³** 低压条形熔断器开关
NH Fuse-Switches-vertical design
- NL** 低压条形熔断器排
NH Fuse-Rails-vertical design
- NZ** 附件
Accessories
- NW** 低压电流互感器
Low Voltage Current Transformers
- NA** 低压避雷器
Low Voltage Surge-Arresters
- HH** 高压熔断器及底座
HV Fuse-Links and-Bases
- T** 通信电源用产品
Telecom Power Supply Products
- S/D** 特种/D系列熔断器及底座
Special Systems/D-System Fuse-Links and-Bases

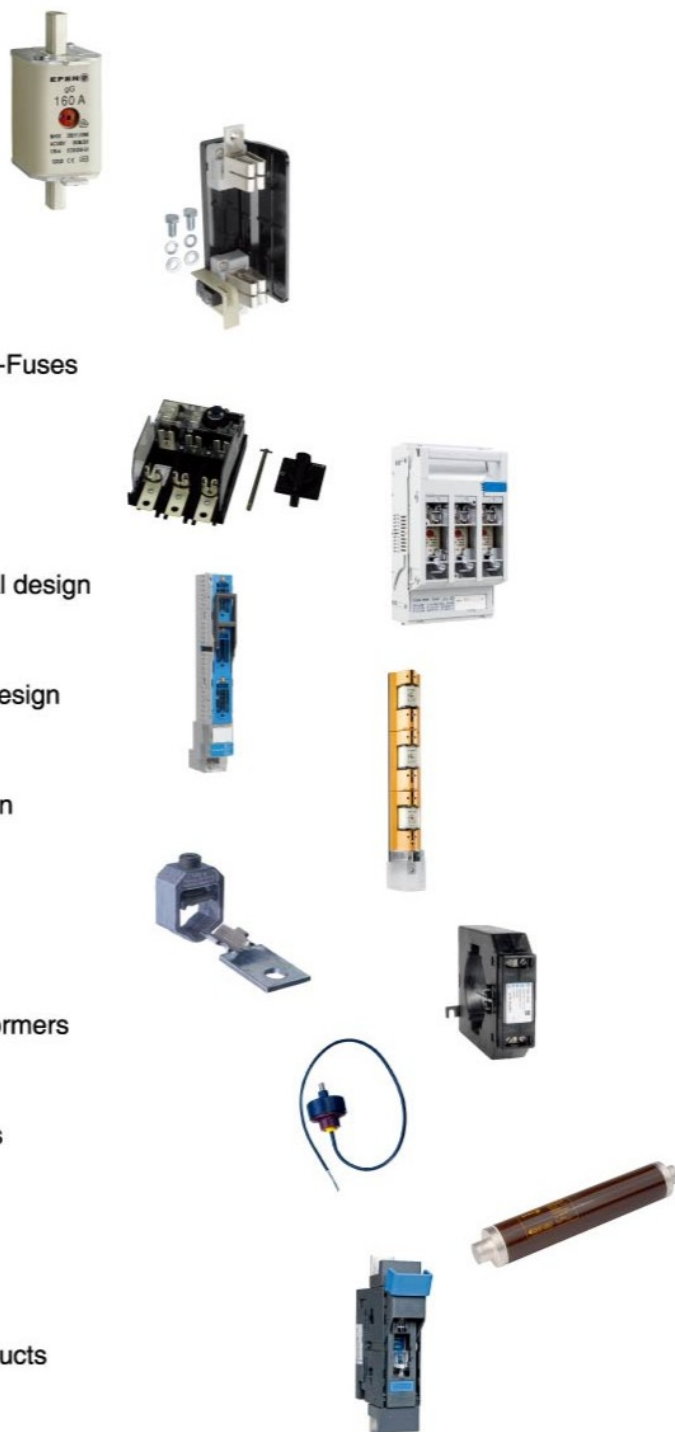

德国总部 EFEN GmbH Schlangenbader Str.40 65344 Eltville,Germany Tel.+49(0)6129-46-0 Fax.+49(0)6129-46-222 Email:efen@efen.com

埃芬中国 中国物流: 东莞埃芬电器制品有限公司 邮编: 523357 电话: 0769-86922132 传真: 0769-86920088
广东东莞石排镇龙岗工业区第4栋

上海办事处: 上海市浦东新区商城路800号(世纪大道1090号)斯米克大厦517室 邮编: 200120 电话: 021-65758878 传真: 021-65758876

北京办事处: 北京市朝阳区东三环北路3号幸福大厦B座517室 邮编: 100027 电话: 010-65684580 传真: 010-65684680

深圳办事处: 深圳市福田区车公庙泰然九路1号盛唐商务大厦西座913室 邮编: 518040 电话: 0755-82559246 传真: 0755-82559244

更多信息请浏览: www.efen.com.cn www.efen.com